


附着Anchorage

塔身Masts/反力Reaction

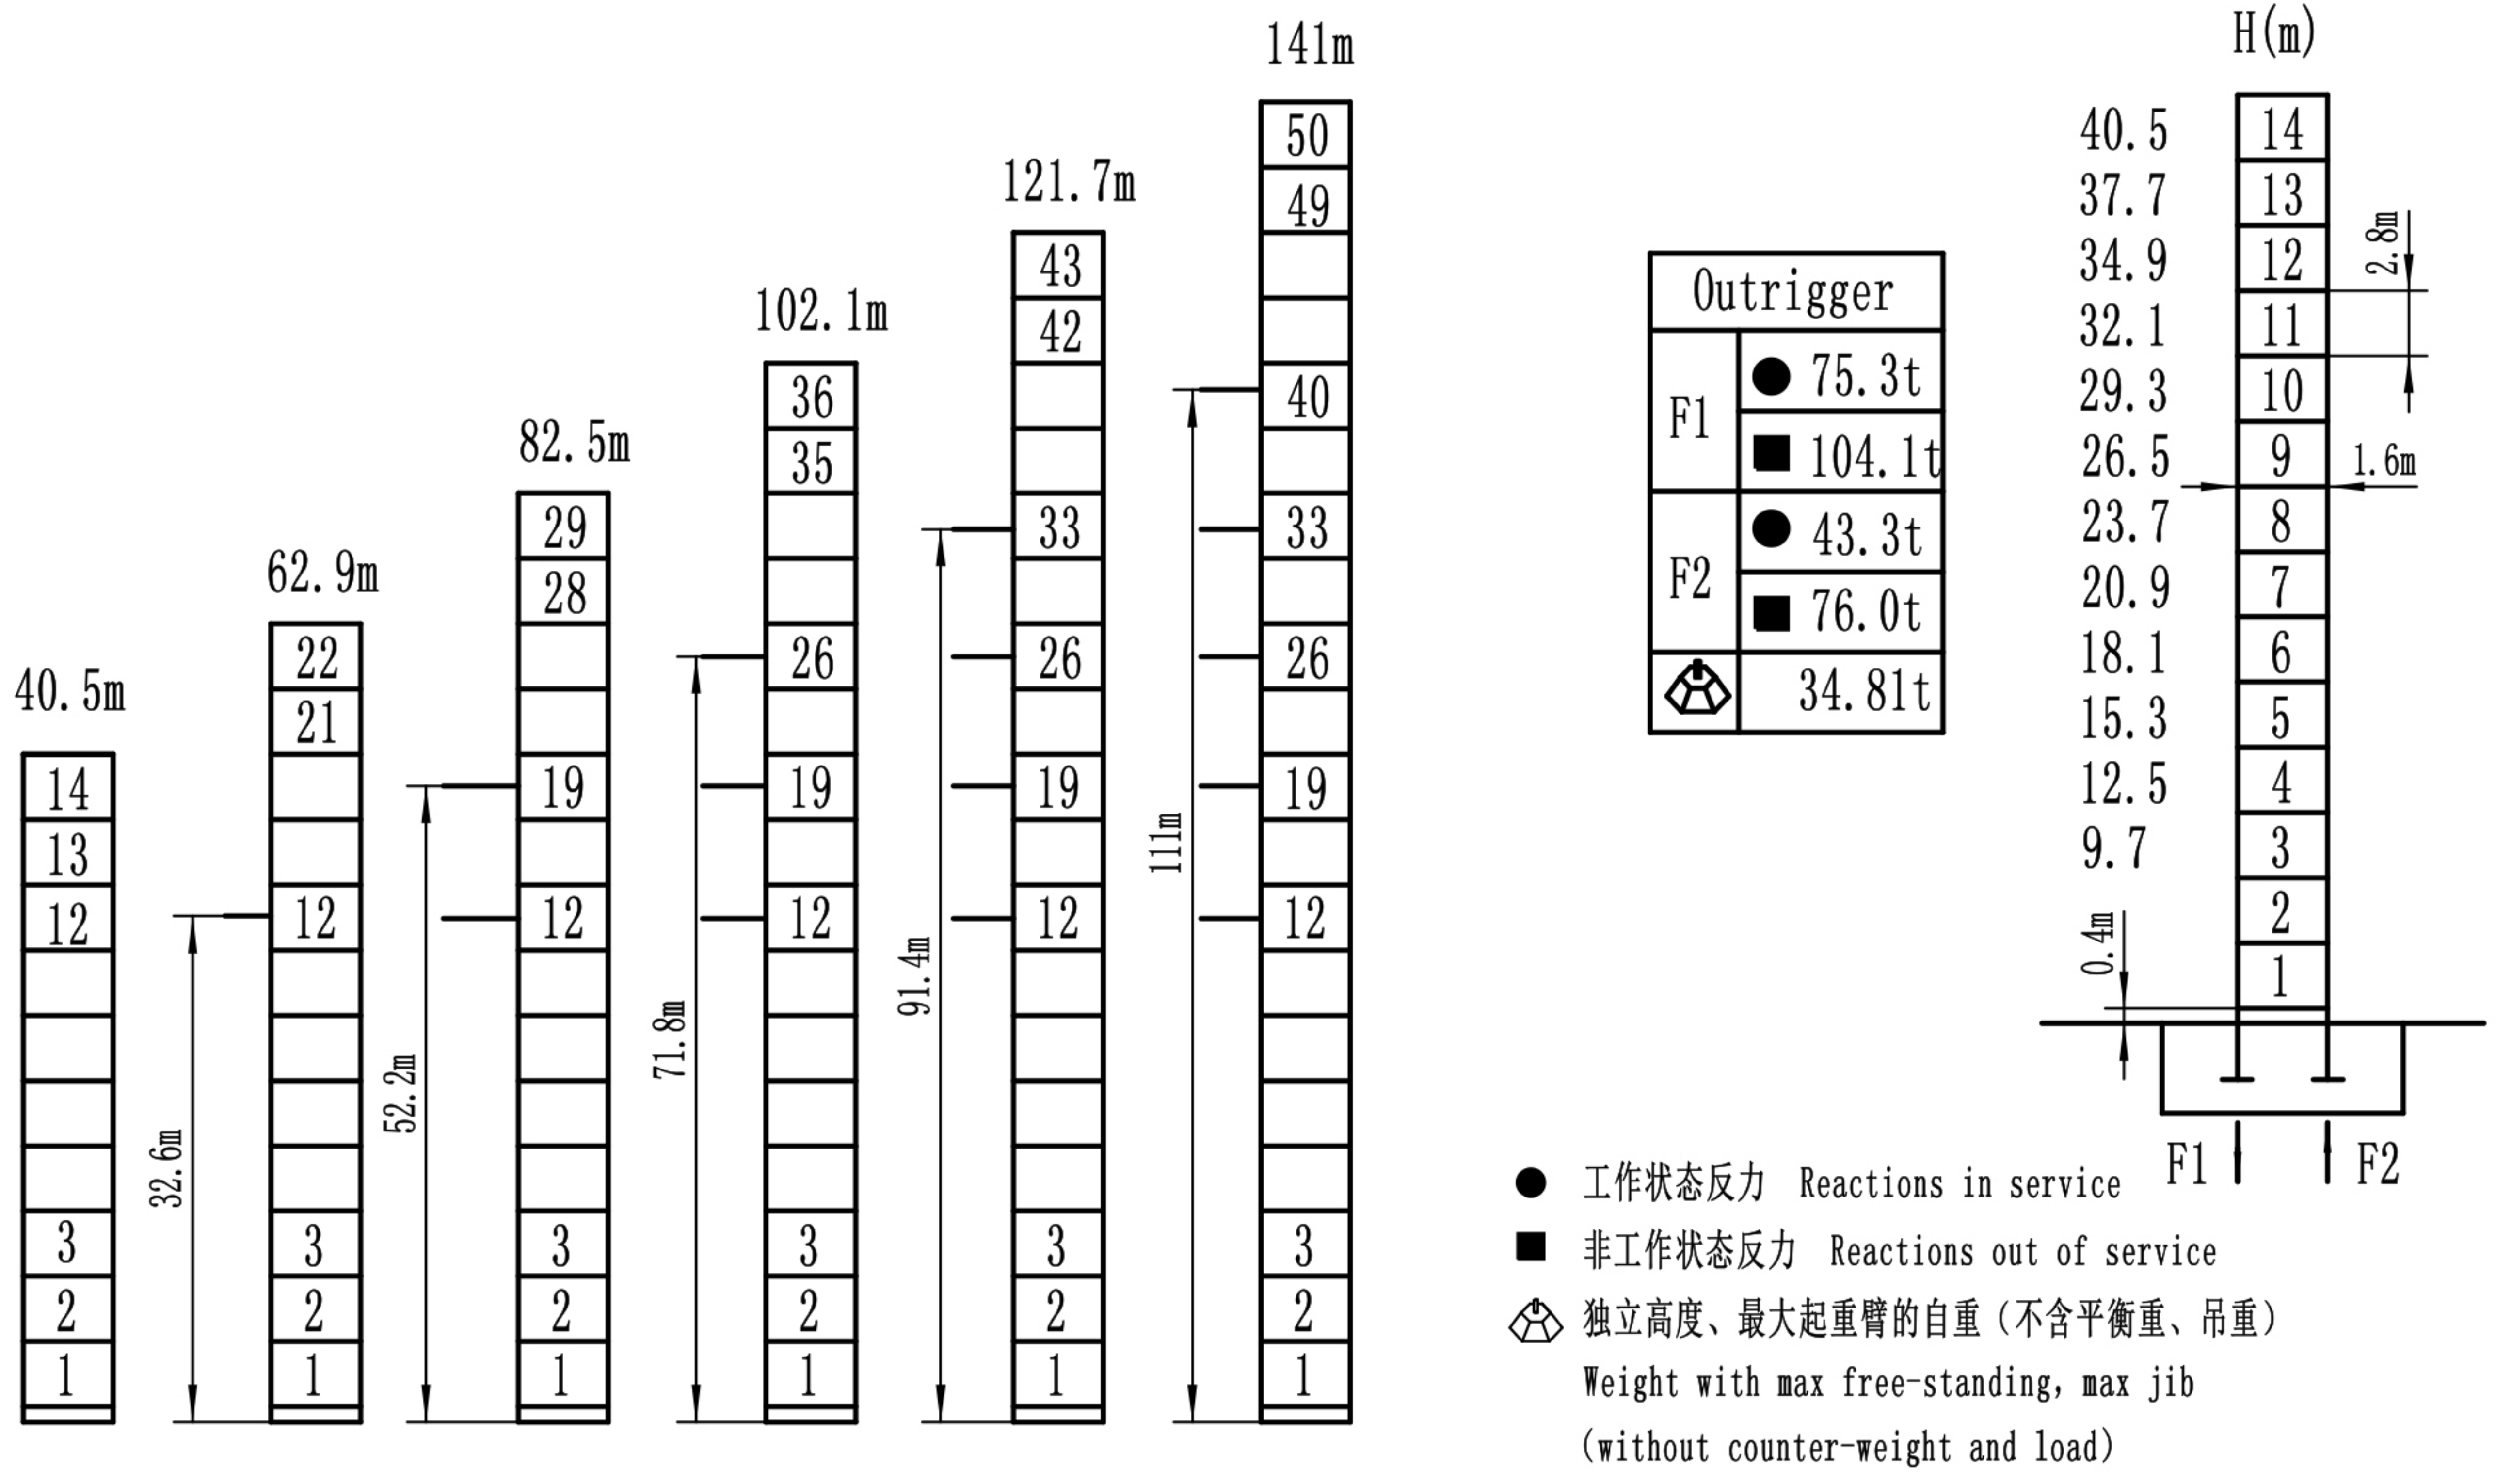

起重特性Load Diagrams

| R(m)            | 最大额定起重重量时的最大工作幅度 Max Capacity (m/t) | 20              | 24   | 28            | 30   | 35   | 36   | 38   | 40   | 42   | 48   | 54   | 60   |      |
|-----------------|-------------------------------------|-----------------|------|---------------|------|------|------|------|------|------|------|------|------|------|
|                 |                                     | 60m臂 (R=61.42m) | bb   | 2.5-14.48/6.0 | 4.13 | 3.33 | 2.77 | 2.54 | 2.10 | 2.02 | 1.89 | 1.77 | 1.66 | 1.38 |
|                 | b                                   | 2.5-26.55/3.0   | 3.00 | 2.82          | 2.59 | 2.15 | 2.07 | 1.94 | 1.82 | 1.71 | 1.43 | 1.22 | 1.05 |      |
| 54m臂 (R=55.42m) | bb                                  | 2.5-14.73/6.0   | 4.21 | 3.40          | 2.82 | 2.59 | 2.15 | 2.07 | 1.93 | 1.81 | 1.70 | 1.42 | 1.20 |      |
|                 | b                                   | 2.5-27.02/3.0   | 3.00 | 2.87          | 2.64 | 2.20 | 2.12 | 1.98 | 1.86 | 1.75 | 1.47 | 1.25 |      |      |
| 48m臂 (R=49.42m) | bb                                  | 2.5-15.34/6.0   | 4.42 | 3.57          | 2.97 | 2.73 | 2.26 | 2.18 | 2.04 | 1.91 | 1.79 | 1.50 |      |      |
|                 | b                                   | 2.5-28.17/3.0   | 3.00 |               | 2.78 | 2.31 | 2.23 | 2.09 | 1.96 | 1.84 | 1.55 |      |      |      |
| 42m臂 (R=43.42m) | bb                                  | 2.5-15.39/6.0   | 4.44 | 3.59          | 2.99 | 2.75 | 2.27 | 2.19 | 2.05 | 1.92 | 1.80 |      |      |      |
|                 | b                                   | 2.5-28.27/3.0   | 3.00 |               | 2.80 | 2.32 | 2.24 | 2.10 | 1.97 | 1.85 |      |      |      |      |
| 36m臂 (R=37.42m) | bb                                  | 2.5-15.43/6.0   | 4.45 | 3.60          | 3.00 | 2.76 | 2.28 | 2.20 |      |      |      |      |      |      |
|                 | b                                   | 2.5-28.35/3.0   | 3.00 |               | 2.81 | 2.33 | 2.25 |      |      |      |      |      |      |      |

传动机构Mechanisms

| 配置Configuration |          | b        |       | bb |     | kW |         | 320m(4 layers) |                       |                |
|-----------------|----------|----------|-------|----|-----|----|---------|----------------|-----------------------|----------------|
| 起升 Hoisting     | QTJ63-I  | m/min    | 80    | 40 | 8.5 | 40 | 20      | 4.25           | 24/24/5.4             | 320m(4 layers) |
|                 |          | t        | 1.5   | 3  | 3   | 3  | 6       | 6              |                       |                |
| 回转 Slewing      | QTH100   | r/min    | 0~0.6 |    |     |    | 3.7×2   |                | ▲超出咨询我们               |                |
| 变幅 Trolleying   | QTB4.0-H | m/min    | 40/20 |    |     |    | 3.3/2.2 |                | Consult us if overtop |                |
| 380V(±10%)50Hz  |          | 34.7(kW) |       |    |     |    |         |                |                       |                |